

Balanced Photoreceiver

Model: OPR-BD080M-L

Features

- FC Fiber Inputs
- InGaAs Detector: 900-1700nm
- >20 dB Common Mode Rejection Ratio
- Provide customized services

Applications


- Spectroscopy
- Laser wind measurement
- Optical Coherence Tomography OCT
- Optical Delay Measurements
- THz Detection



Electrical and optical characteristics(T=23°C ± 5°C , Humidity=35% ± 15%)


Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Spectral response range		900~1700			nm
Detector Diameter		75			μm
-3dB bandwidth	BW	80			Mhz
Detector responsiveness	R _V		1.0		A/W
Transimpedance gain	G	60			KV/A
Saturation input optical power	P _{in}		70		μW
Incident power	P _{IN(MAX)}		5	5	mW
Over output voltage noise	N		22		mV _{pp}
Common-mode Rejection Ratio	CMRR		25		dB
Output impedance	R _O		50		
Supply voltage	V _{CC}		± 12		V
Supply current	I _{CC}		140		mA
Optical input		FC/PC or FC/APC or Free Space			
Signal output		SMA			

Package Drawings (Unit: mm)

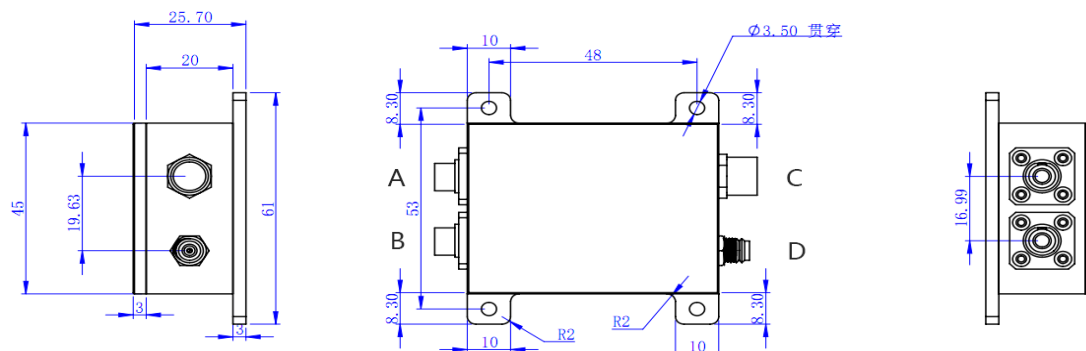


A, B are optical input interfaces (FC), C is power input interfaces (M8), and D is signal output interfaces (SMA).


Noise spectral density distribution

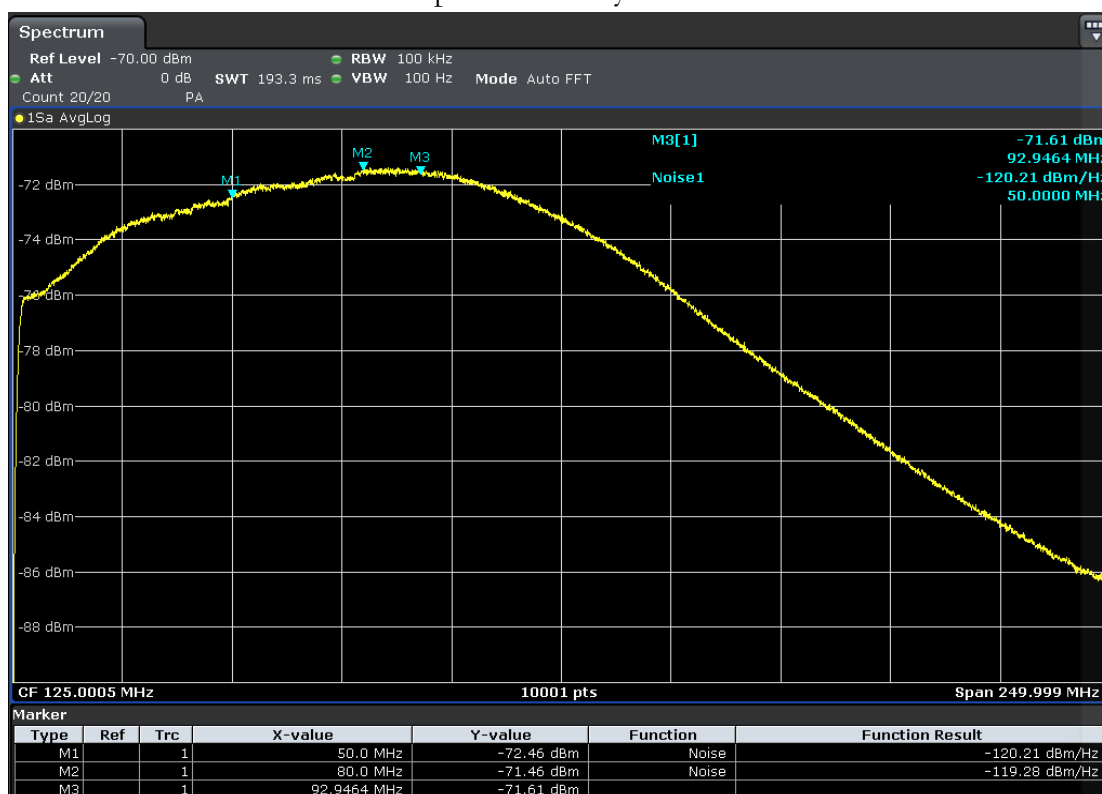

Typical impulse response for positive and negative input

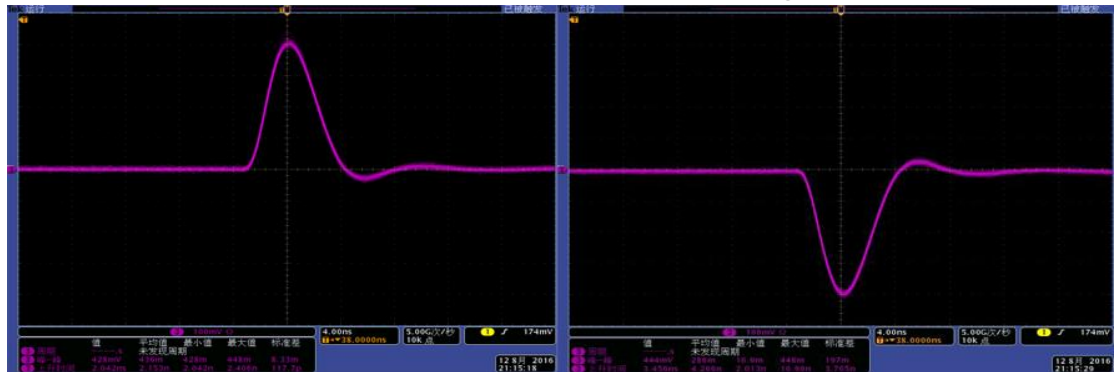

Frequency Response (inverting input)

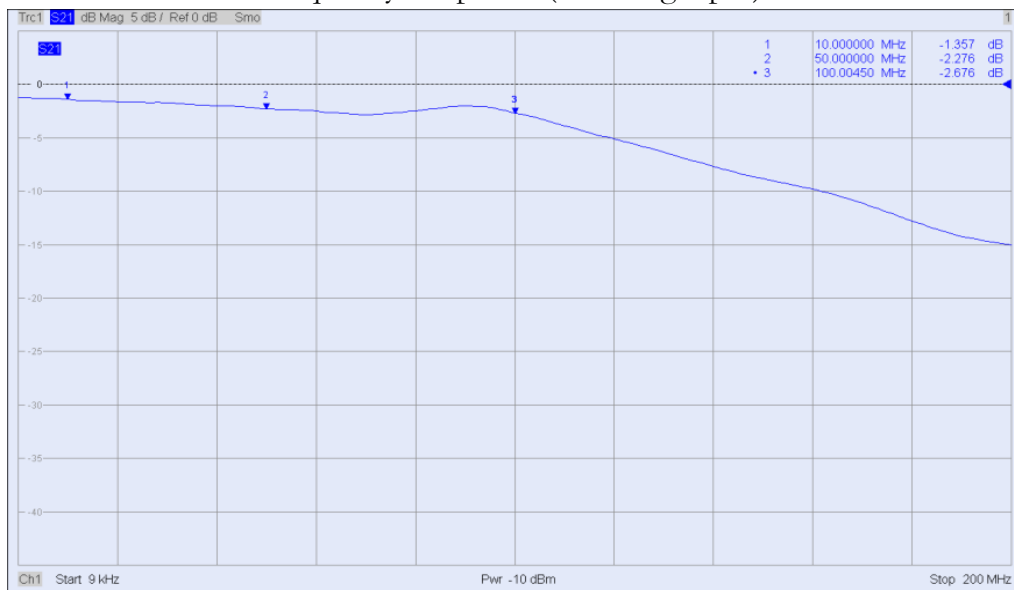

Frequency Response (noninverting input)

